


CONTI® V FO ADVANCE


Transversely stiff raw-edge heavy-duty V-belts for powerful, sustained power transmission with enhanced running smoothness, according to DIN 7753

Properties:

- temperature range from -30°C to +90°C
- very good flexibility thanks to molded teeth
- enhanced running smoothness
- matched-set L=L (from 1000 mm)
- electrically conductive to ISO 1813 (from 3,500 mm length electrically conductive after testing)
- conditionally resistant to oil
- suitable for tropical climates
- dust-proof



Belt structure:

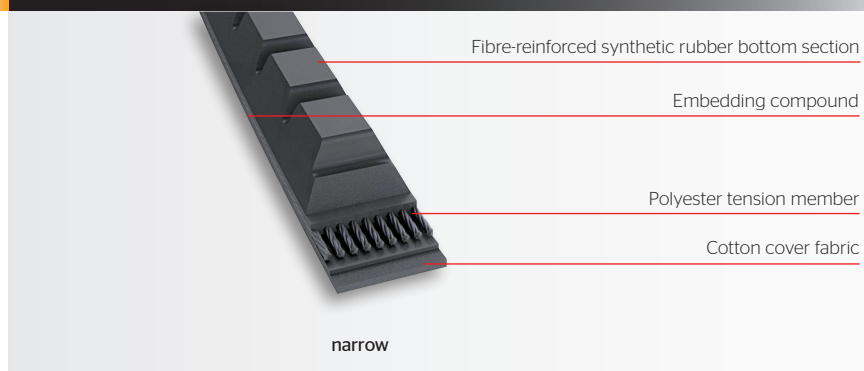

Profile	Length range L _d (mm)
XPZ / 3VX	562 - 3550
XPA	590 - 4000
XPB / 5VX	950 - 6700
XPC	2000 - 7100

Types installed on REMEZA air compressor

Item Code	Description
CTXPA1180	CONTITECH V BELT XPA 1180
CTXPA1250	CONTITECH V BELT XPA 1250
XPZ875	CONTITECH V BELT XPZ 875
CTXPA1107	CONTITECH V BELT XPA 1107
CTXPA1060	CONTITECH V BELT XPA 1060

Comparison of products:

